



WIPE-OUT® STAIN BLOCKER



Wipe-Out Stain Blocker is a concentrated acrylic latex stain blocking primer that provides exceptional adhesion and stain blocking properties as a preparation for the installation of athletic surfaces. Wipe-Out is intended to impede the migration of most bleeding stains on new asphalt or concrete surfaces, as well as existing acrylic surfaces.



WHAT CAUSES RUST SPOTS?

- Some excerpts borrowed from the ASBA Position Paper "Rust Spots", March 2004

In some parts of the country, the crushed stone aggregate used in asphalt may contain iron or other contaminants.

It is impossible to obtain a guarantee from an asphalt producer or supplier against the presence of this material, particularly if its source has a history of providing aggregates containing iron. Also, since a producer's source of aggregate may vary from time to time, it is impossible to predict whether a particular batch of asphalt will contain iron or to rely on the fact that the asphalt from a given producer or supplier has not contained iron in the past. Therefore, this condition is beyond the control of the contractor and the contractor cannot assume responsibility. In areas where this occurs, it will affect all local contractors equally.

If iron is present, it may oxidize, forming rust spots or streaks in the surface of the court. These spots or streaks, while unsightly, will not affect play or shorten the useful life of the court.

Wipe-Out Stain Blocker, applied over new or existing asphalt or concrete, or previously coated surfaces, will inhibit the transmission of stains through your surface and should be used on any court where iron pyrites or other contaminants may be present.



100%
ACRYLIC
LATEX



EXCEPTIONAL
ADHESION



BLOCKS MOST
BLEEDING TYPE
STAINS




INTERIOR AND
EXTERIOR USE

Wipe-Out Stain Blocker can be applied over new or existing asphalt or concrete surfaces that have a sound base of adequate thickness and stability.

Existing surfaces should have good drainage and be free from cracks and depressions.

IDEAL FOR USE ON:

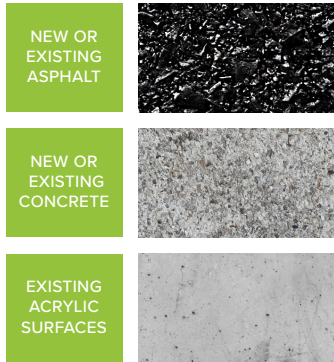

TECHNICAL SPECS

SKU #	4203
AVAILABLE SIZE	30 gallon or 55 gallon drum
COVERAGE RATE	0.04-0.06 gal/yd ² or 0.18-0.2 L/m ²
APPLICATION	50-70 durometer rubber squeegee
DRYING TIME	2 hours per coat
COLOR RANGE	Black



OUR COMMITMENT TO QUALITY

Since 1953, California Sports Surfaces has set the industry standard, providing customers globally with a premier offering of acrylic surface systems.

From professional tournaments to neighborhood courts, CSS and its iconic brands – DecoTurf[®], Plexipave[®], Rebound Ace[®], CoolTop[®], Plexitrac[®], and Premier Sports Coatings[®] – deliver cutting-edge surface technology that meets the demands of athletes at every level. CSS is dedicated to evolving the game of play through innovation, performance, and unmatched quality.